


# E385B

## ONE-PIECE BOOM

### DIMENSIONS (mm) - OPERATING WEIGHT

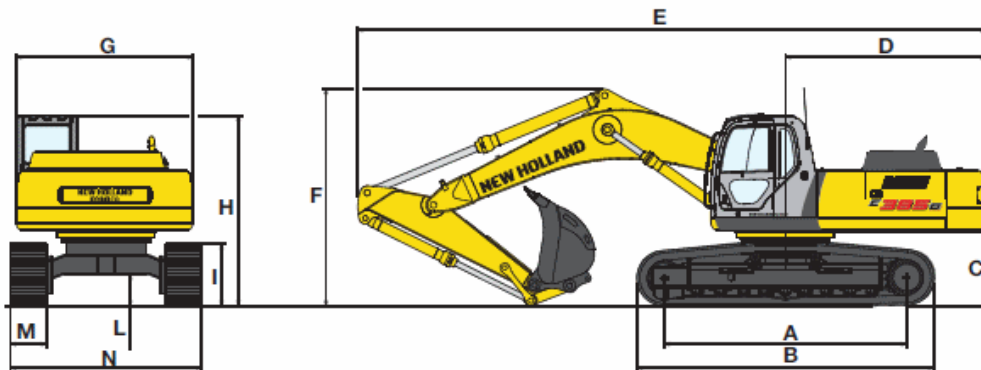

VERSIONS	A	B	C	D	E	F	G	H	I	L
					(1) 11370	(1) 3655				
E385BEL	4050	4960	1185	3500	(2) 11270	(2) 3615	2950	3195	1050	530
					(3) 11175	(3) 3350				
					(4) 11215	(4) 3485				
					(1) 11370	(1) 3655				
E385BLC	4050	4960	1185	3500	(2) 11270	(2) 3615	2950	3195	1050	530
					(3) 11175	(3) 3350				
					(4) 11215	(4) 3485				

Dipperstick: (1) 2330 mm - (2) 2600 mm - (3) 3300 mm - (4) 4150 mm

		E385BEL			E385BLC			
M - Shoe width	mm	600	700	800	600	700	800	900
N - Maximum width	mm	2990	3090	3190	3190	3290	3390	3490
Operating weight *	kg	35655	36115	36605	35740	36200	36690	37180
Specific ground pressure	bar	0,72	0,62	0,55	0,72	0,62	0,55	0,51

\* With 3300 mm dipperstick and 1.6 m<sup>3</sup> bucket

## DIGGING PERFORMANCE

ONE - PIECE BOOM = 6500 mm

DIPPERSTICK		2330	2600	3300	4150
A	mm	10300	10600	11200	11930
A'	mm	10090	10390	11000	11740
B	mm	6510	6780	7480	8330
B'	mm	6300	6600	7320	8190
C	mm	10100	10360	10550	10740
D	mm	6970	7200	7390	7600
E	mm	4410	4500	4370	4430

BREAKOUT FORCE:					
Bucket	daN	22000	22000	22000	22000
Dipperstick	daN	22500	20200	16000	13500

WITH "POWER BOOST" ON:					
Bucket	daN	24000	24000	24000	24000
Dipperstick	daN	25000	22400	17700	15000

